




# D12260 (12V26Ah)

D 12260 is a general purpose battery with 5 years floating design life, meet with IEC, JIS standard. With heavy duty grid, thickness plates, special additives, **D series** battery have long and reliable standby service life.






## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	26Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 8.60 Kg
Max. Discharge Current	260 A (5 sec)
Internal Resistance	Approx. 10 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.7 to 13.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	7.8 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	<b>Dynamics</b> batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Faston F3/F13
Constainer Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V2 can be available upon request.

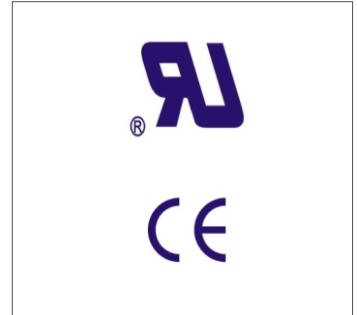

## Dimensions

Unit: mm Dimension: 166(L)<sub>i</sub>175(W)<sub>i</sub>125(H)

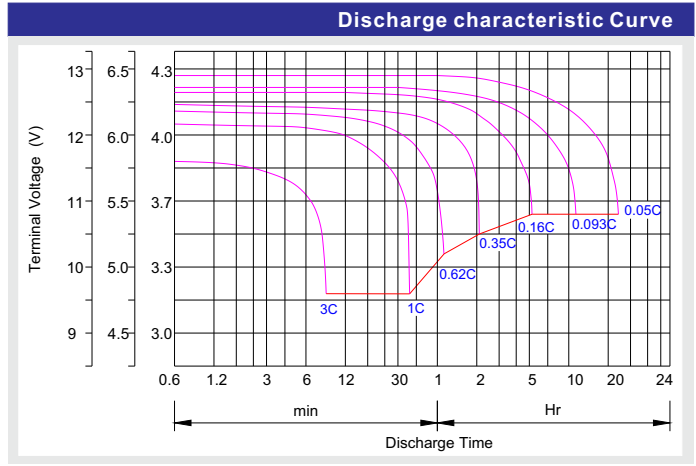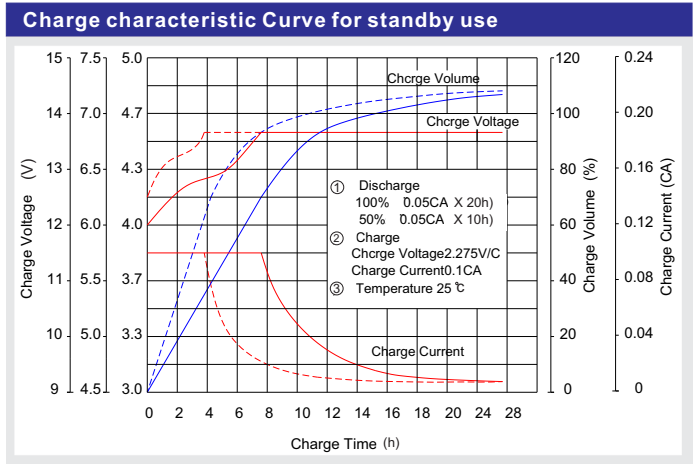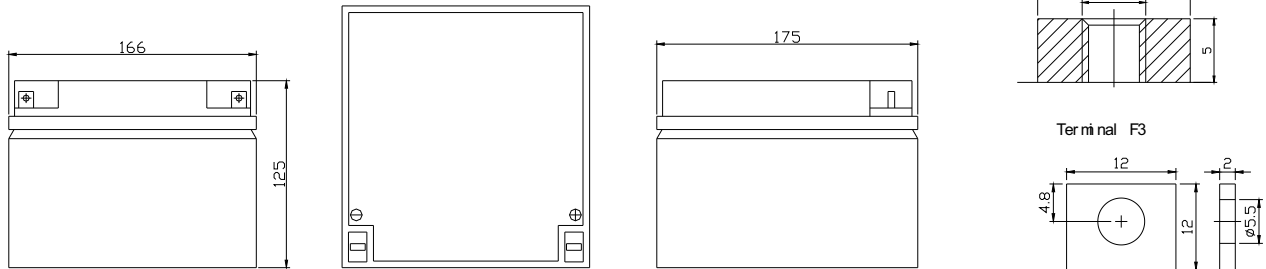


# D12260

12V26Ah




**Dynamics**

### Effect of temperature on long term float life

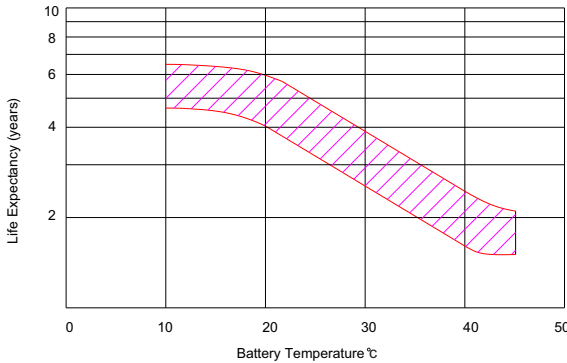

### Storage characteristic

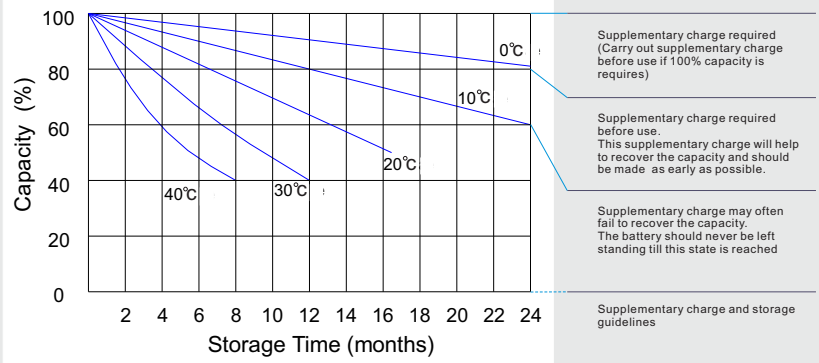

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	889.1	650.1	478.7	337.4	193.3	119.3	78.31	64.90	51.17	37.48	30.71	16.22
10.0V	870.9	621.0	468.7	333.2	192.3	118.9	78.16	64.74	50.86	37.32	30.39	16.06
10.2V	822.1	600.3	462.4	329.3	190.9	117.8	77.69	64.43	50.70	37.00	30.23	15.90
10.5V	740.3	554.7	440.9	321.8	189.1	116.7	77.22	63.96	50.23	36.69	29.92	15.75
10.8V	665.9	503.6	405.1	307.2	184.4	115.0	75.35	62.24	49.45	35.90	29.60	15.59
11.1V	574.8	447.3	361.7	287.8	174.7	109.7	71.60	59.28	46.96	34.64	28.66	14.96

### Constant Power Discharge Characteristics : W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	889.1	650.1	478.7	337.4	193.3	119.3	78.31	64.90	51.17	37.48	30.71	16.22
10.0V	870.9	621.0	468.7	333.2	192.3	118.9	78.16	64.74	50.86	37.32	30.39	16.06
10.2V	822.1	600.3	462.4	329.3	190.9	117.8	77.69	64.43	50.70	37.00	30.23	15.90
10.5V	740.3	554.7	440.9	321.8	189.1	116.7	77.22	63.96	50.23	36.69	29.92	15.75
10.8V	665.9	503.6	405.1	307.2	184.4	115.0	75.35	62.24	49.45	35.90	29.60	15.59
11.1V	574.8	447.3	361.7	287.8	174.7	109.7	71.60	59.28	46.96	34.64	28.66	14.96

All mentioned values are average values.

### Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL BATTERY	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM BATTERY	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Charge the batteries at least once every six months, if they are stored at 25°C.

### Discharge Current VS. Discharge Voltage

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) < 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C